

# ERT2669

SCISSOR LIFT

ELECTRIC POWERED ROUGH TERRAIN SERIES



## KEY SPECS

### Platform Height

26-ft 2-in / 8-m

### Platform Capacity

1,500-lb / 680-kg

### Machine Width

69.3-in / 1.76-m

### Stowed Drive Speed

3.5 mph / 5.6 kph

## KEY FEATURES

- Electric powered rough terrain models offer drive capability at full height, limiting unnecessary trips up and down for working professionals.
- As the largest platform size in its class, you can bring more operators and tools to the job.
- Delivers the latest technology, featuring an LCD platform control box with LiftSense technology and USB charging for next-level, real-time productivity and service communication to the operator.
- Utilizes higher part commonality and a maintenance-free 2WD AC drive system for simplified service across the rough terrain family.

## ACCESSORIES & OPTIONS

- 8 x 6V, 310 Amp Hr Batteries
- JLG CleanGuard Leak Containment System
- Special Hydraulic Fluids
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Operator Access Control
- Special Paint
- Genset, Range Extending
- Platform Worklights
- White Noise Backup Alarm
- Heavy Duty Pipe Racks
- Second Flashing Amber Beacons - LED
- SkySense® Enhanced Detection System
- Hydraulic Leveling Jacks (Auto Level)

## STANDARD SPECIFICATIONS

Performance	Indoor	Outdoor
Platform Height-Elevated	26-ft 2-in / 8-m	26-ft 2-in / 8-m
Platform Height-Lowered	4-ft 3-in / 1.3-m	4-ft 3-in / 1.3-m
Platform Capacity	1,500-lb / 680-kg	1,500-lb / 680-kg
Capacity on Platform Extension	300-lb / 136-kg	300-lb / 136-kg
Number of Occupants	4	4
Lift / Lower Time	37/37 seconds	37/37 seconds
Maximum Drive Height	Fully Elevated	Fully Elevated
Weight w/One Extension*	8,250-lb / 3,750-kg	8,250-lb / 3,750-kg
Ground Bearing Pressure	40 psi / 2.81 kg/cm <sup>2</sup>	40 psi / 2.81 kg/cm <sup>2</sup>
Drive Speed-Lowered	3.5 mph / 5.6 km/h	3.5 mph / 5.6 km/h
Drive Speed-Raised	0.5 mph / 0.8 km/h	0.5 mph / 0.8 km/h
Gradeability	40%	40%
Max Tilt Rating - Side-to-Side	2.5 Degrees	2.5 Degrees
Max Tilt Rating - Fore and Aft	3 Degrees	3 Degrees
Turning Radius - Inside	83-in / 2-m	83-in / 2-m
Turning Radius - Outside	175-in / 4.44-m	175-in / 4.44-m

\* Certain options or country standard will increase weight.

## Power Source

Drive (2WD)	AC Electric Drive
Batteries	8 x 6V 225 Ah

## Tires

Standard	26-in x 12-in Foam-filled Non-Marking
Optional	26 x 12 Foam-Filled Lug Tread
Optional	26 x 12 Foam Filled Turf

## Hydraulic System

Capacity	13.2 gal / 50 L
----------	-----------------

## STANDARD FEATURES

- 110V-AC Receptacle In Platform
- Hourmeter
- Pin-Less Fold Down Rail System
- 2WD AC Drive System
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- 23 Amp Automatic, SCR Battery Charger
- LED Motion/Amber Beacon (CS550)
- Platform Control Box with LCD Display
- 42-in Roll-out Deck Extension
- Lubrication-Free Scissor Arm Bushings
- Proportional Lift and Drive
- All Motion Alarm
- Manual Descent Pull Cable<sup>1</sup>
- Self-closing Gate
- ClearSky Smart Fleet™ Hardware (CS550)
- Moveable, Removable Platform Console Box
- Scissor Maintenance Prop
- Descent Alarm
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Telematics-Ready Harness
- Full Time Traction Control
- Oscillating Front Axle
- Horn

- Tie Down Lugs
- USB Charger and Phone Holster

# ERT2669



SCISSOR LIFT

ELECTRIC POWERED ROUGH TERRAIN SERIES



## DIMENSIONS

All dimensions are approximate

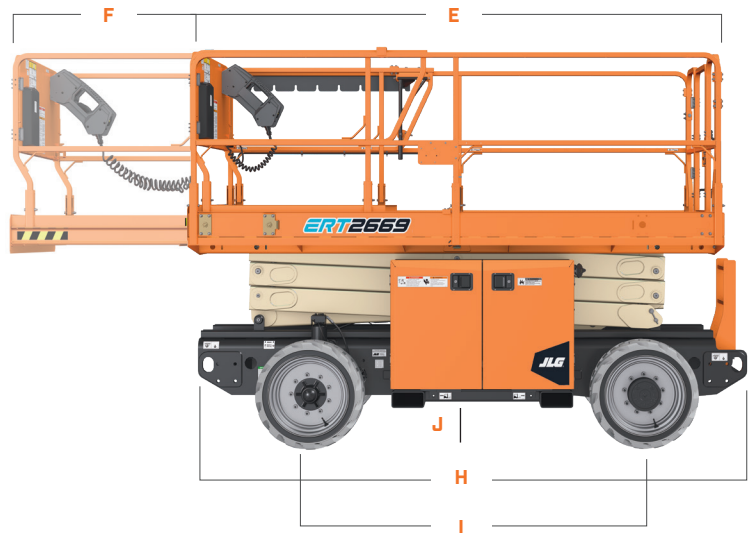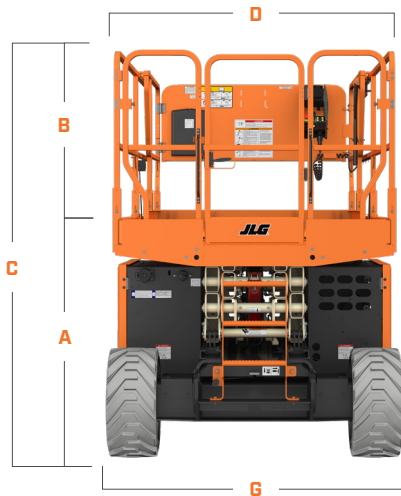

<b>A.</b> Platform Height – Lowered	4-ft 3-in / 1.3-m
<b>B.</b> Platform Railing Height	44.7-in / 1.14-m
<b>C.</b> Machine Height	96.7-in / 2.46-m
<b>D.</b> Platform Width	63-in / 1.6-m
<b>E.</b> Platform Length	130.5-in / 3.3-m

<b>F.</b> Platform Extension	42-in / 1.07-m
<b>G.</b> Machine Width	69.3-in / 1.76-m
<b>H.</b> Machine Length	139-in / 3.53-m
<b>I.</b> Wheelbase	81.3-in / 2.07-m
<b>J.</b> Ground Clearance	10.1-in / 25.7-cm



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



**JLG INDUSTRIES, INC.**  
Toll-free US 877-JLG-LIFT  
**JLG.com**

An Oshkosh Corporation Business